




## HIGHLIGHTS

- RoHS Directive 2002/95/EC compliant
- NEMA TS2 Certified
- No serial cable distance limitations enables communication between a host PC and serial devices located anywhere across an Ethernet network
- Software selectable RS-232/422/485 serial interfaces
- Supports native COM, TTY, or TCP/IP Socket communication modes
- Web-based configuration makes setup and management changes quick and easy
- Real-time e-mail event notification alerts administrator of potential connection and security issues
- Wide -37° to 74°C industrial temperature range
- Rugged stainless steel housing enables DIN rail or panel-mounting
- PortVision® enterprise monitoring and management software automatically monitors devices on the network and enables user to view status, update firmware and resolve issues remotely
- Software developer kit available for users interested in writing custom applications to run on the DeviceMaster platform



Ethernet-Enabled Serial Devices using NS-Link COM/TTY Driver



DeviceMaster Serial Tunneling using TCP Socket Communications



## DeviceMaster® RTS 4-Port DB9/RJ45

The Control DeviceMaster RTS 4-Port DB9/RJ45 is a four-port device server designed for network-enabling serial communications devices. When used with the included NS-Link™ driver software and a host PC, the DeviceMaster RTS enables placement of COM or TTY ports anywhere on an Ethernet network or across the Internet. In applications where connecting legacy serial devices to a PC without software

changes is a requirement, a pair of DeviceMaster RTS units can be used to create a point-to-point serial tunnel across the network that seamlessly transfers serial data via TCP or UDP socket connections.



## SPECIFICATIONS

### HARDWARE

Dimensions	10.8" x 1.5" x 6.3"
Processor	ARM7 44Mhz
8MB RAM	
4MB Flash (Programmable)	
(2) 10/100 Base-T Ethernet	
Black Finished Steel Enclosure	
Product Weight	3.44 Lbs
Packaged Shipping Weight	7.48 Lbs
Panel/Rack Mountable	
LED Indicators	
Status	
Ethernet Link/Activity	
Collision	
100MB Ethernet	
RX/TX Per Port	
Surge Protection	15KV

### ELECTRICAL SPECIFICATIONS

Device Requirements	9 to 30 VDC
Device Consumption	4.8 Watts
External Power Supply	(Included)
Input	90 to 260 VAC @
60Hz	
Output	200mA @ 24 VDC

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature*	-37 to 74°C
Storage Temperature	-40 to 85°C
Operating Humidity	5% to 95%
Altitude	0 to 10,000 Ft
Heat Output	16.4 BTU/Hr
MTBF	25.0 Years

### DEVICE DRIVERS

Microsoft Windows NT®, Microsoft Windows 2000®, Microsoft Windows Server 2003®, Microsoft Windows XP®, Microsoft Windows 7, Microsoft 2008 Server, Linux

### SERIAL COMMUNICATIONS

Software-Selectable	RS-232/422/485
Baud Rates	50 to 230 Kbps
Serial Connectors	(4)
DB9/RJ45 Adapters	
Data Bits	7 or 8
Parity	Odd, Even, None
Stop Bits	1 or 2

### FEATURES

Lowest Latency  
 NS-Link COM/TTY Port Redirector  
 PortVision Remote Management  
 TCP/IP & UDP Socket Services  
 Real-Time Clock  
 Telnet  
 HTTP  
 SNMP  
 DHCP / RARP / ARP / BOOTP / Ping  
 Hardware & Software Flow Control  
 Watchdog Reset  
 Event Notification  
 RFC 1006

### REGULATORY APPROVAL MARKS





CE Mark, FCC Part 15 Subpart B Class A, C-Tick, CUL, RoHS 2002/95/EC

### REGULATORY STANDARDS

Immunity: EN55024, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, IEC 1000-4-2, IEC 1000-4-3, IEC 1000-4-4, IEC 1000-4-5, IEC 1000-4-6, IEC 1000-4-8, IEC 1000-4-11  
 Emission: EN55022 & A1:2000 IEC 1000-3-2, IEC 1000-3-3, CISPR-22, ICES-003  
 Safety: EN60950, IEC 60950, CSA C22.2 No. 50/UL60950  
 NEMA TS2 Compliant



### RTS PIN ASSIGNMENTS

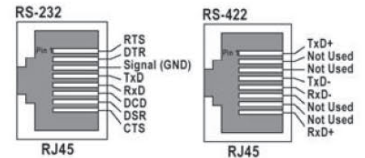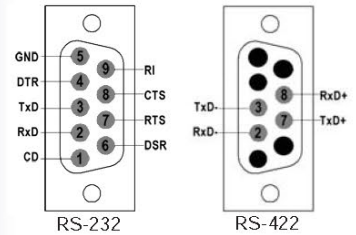

### ORDERING INFORMATION

99446-6 DeviceMaster RTS 4-Port DB9/RJ45

### PRODUCT SUPPORT & SERVICE INFORMATION

#### Warranty Information

Control offers a 30-day satisfaction guarantee and 5-year limited warranty.

#### Sales Support

+1.763.494.4100  
 sales@comtrol.com

#### Technical Support

+1.763.494.4100  
 www.comtrol.com/support

#### Email, FTP, and Web Support

info@comtrol.com  
 ftp.comtrol.com  
 www.comtrol.com

\*We have tested the products to run at these temperatures.

© 2009 by Control Corporation. All Rights Reserved. Printed in the U.S.A. All trademarks used herein are the property of their respective trademark holders. Specifications are subject to change without notice. LT1255E

**mobotrex**  
 MOBILITY & TRAFFIC EXPERTS