




HIGHLIGHTS


- RoHS Directive 2002/95/EC compliant
- NEMA TS2 Certified
- No serial cable distance limitations enables communication between a host PC and serial devices located anywhere across an Ethernet network
- Software selectable RS-232/422/485 serial interfaces
- Supports native COM, TTY, or TCP/IP Socket communication modes
- Web-based configuration makes setup and management changes quick and easy
- Real-time e-mail event notification alerts administrator of potential connection and security issues
- Built-in two-port 10/100 Ethernet switch
- Wide -37° to 74°C industrial temperature range
- Rugged stainless steel housing enables DIN rail or panel-mounting
- PortVision® enterprise monitoring and management software automatically monitors devices on the network and enables user to view status, update firmware and resolve issues remotely
- Software developer kit available for users interested in writing custom applications to run on the DeviceMaster platform



Part Number
99449-7

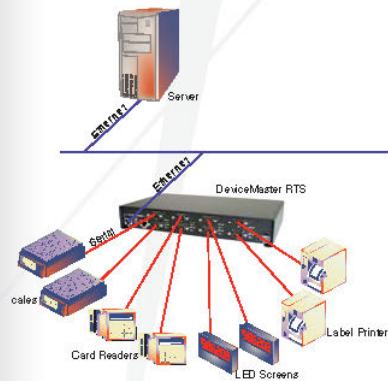

Ethernet-Enabled Serial Devices
using NS-Link COM/TTY Driver

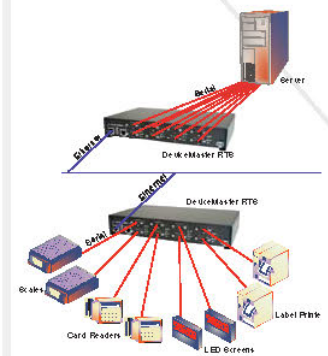

DeviceMaster Serial Tunneling using
TCP Socket Communications



DeviceMaster® RTS 8-Port DB9/RJ45

The Control DeviceMaster RTS 8-Port DB9/RJ45 is an eight-port device server designed for network-enabling serial communications devices. When used with the included NS-Link™ driver software and a host PC, the DeviceMaster RTS enables placement of COM or TTY ports anywhere on an Ethernet network or across the Internet. In

applications where connecting legacy serial devices to a PC without software changes is a requirement, a pair of DeviceMaster RTS units can be used to create a point-to-point serial tunnel across the network that seamlessly transfers serial data via TCP or UDP socket connections.



SPECIFICATIONS

HARDWARE

Processor	ARM7 44 Mhz
8MB RAM	
4MB Flash (Programmable)	
(2) 10/100 Base-T Ethernet	
Black Finished Steel Enclosure	
Product Weight	3.75 Lbs
Packaged Shipping Weight	8.12 Lbs
Panel/Rack Mountable	
LED Indicators	
Status	
Ethernet Link/Activity	
Collision	
100MB Ethernet	
RX/TX Per Port	
Surge Protection	15KV

ELECTRICAL SPECIFICATIONS

Device Requirements	9 to 30 VDC
Device Consumption	6.96 Watts
External Power Supply	(Included)
Input	90 to 260 VAC @
60Hz	
Output	290mA @ 24 VDC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature*	-37 to 74°C
Storage Temperature	-40 to 85°C
Operating Humidity	5% to 95%
Altitude	0 to 10,000 Ft
Heat Output	23.8 BTU/Hr
MTBF	21.5 Years

DEVICE DRIVERS

Microsoft Windows NT®, Microsoft Windows 2000®, Microsoft Windows Server 2003®, Microsoft Windows XP®, Microsoft Windows 7, Microsoft 2008 Server, Linux

SERIAL COMMUNICATIONS

Software-Selectable	RS-232/422/485
Baud Rates	50 to 230 Kbps
Serial Connectors	(8)
DB9/RJ45 Adapters	
Data Bits	7 or 8
Parity	Odd, Even, None
Stop Bits	1 or 2

FEATURES

Lowest Latency
 NS-Link COM/TTY Port Redirector
 PortVision Remote Management
 TCP/IP & UDP Socket Services
 Real-Time Clock
 Telnet
 HTTP
 SNMP
 DHCP / RARP / ARP / BOOTP / Ping
 Hardware & Software Flow Control
 Watchdog Reset
 Event Notification
 RFC 1006
 Supports IP multicast data transmission

REGULATORY APPROVAL MARKS


CE Mark, FCC Part 15 Subpart B Class A, C-Tick, CUL, RoHS 2002/95/EC

REGULATORY STANDARDS

Immunity: EN55024; EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, IEC 1000-4-2, IEC 1000-4-3, IEC 1000-4-4, IEC 1000-4-5, IEC 1000-4-6, IEC 1000-4-8, IEC 1000-4-11
 Emission: EN55022 & A1:2000 IEC 1000-3-2, IEC 1000-3-3, CISPR-22, ICES-003
 Safety: EN60950, IEC 60950, CSA C22.2 No. 50/UL60950
 NEMA TS2 Compliant



RTS PIN ASSIGNMENTS

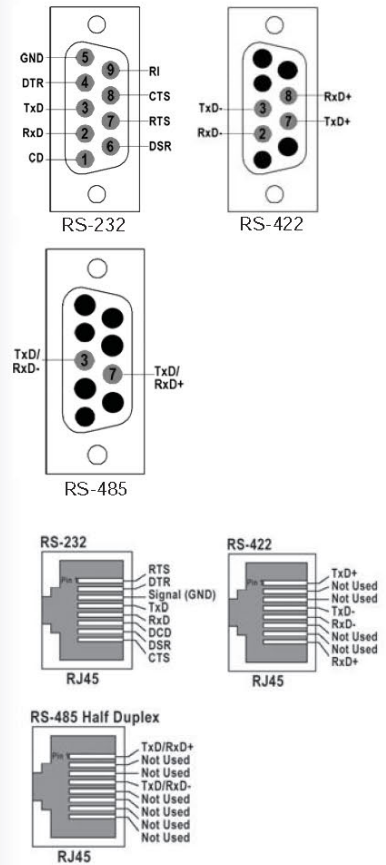

ORDERING INFORMATION

99449-7 DeviceMaster RTS 8-Port DB9/RJ45

PRODUCT SUPPORT & SERVICE INFORMATION

Warranty Information

Control offers a 30-day satisfaction guarantee and 5-year limited warranty.

Sales Support

+1.763.494.4100
sales@comtrol.com

Technical Support

+1.763.494.4100
www.comtrol.com/support

Email, FTP, and Web Support

info@comtrol.com
ftp.comtrol.com
www.comtrol.com

*We have tested the products to run at these temperatures.

© 2009 by Control Corporation. All Rights Reserved. Printed in the U.S.A. All trademarks used herein are the property of their respective trademark holders. Specifications are subject to change without notice. LT1256E