



FRONT (TRAFFIC) SIDE

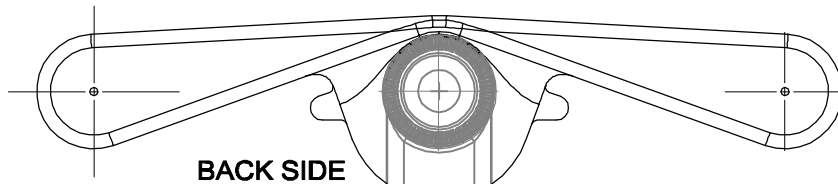


BACK SIDE

SEE DWG. 9.3.1 FOR
PARTS LIST AND WEEP
HOLE INSTRUCTIONS.

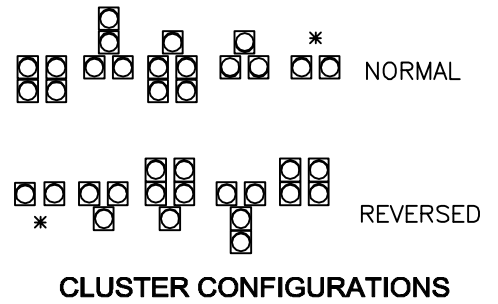

FRONT (TRAFFIC) SIDE

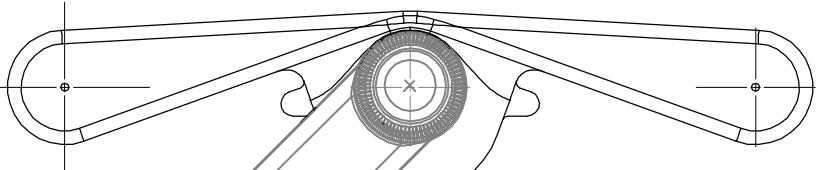

BACK SIDE

* USE 15PC PEDESTRIAN
CAP IF THERE IS NO
CENTER SIGNAL HEAD, SEE
CLUSTER CONFIGURATIONS.

45V ANGLE OR
35E STRAIGHT
PLUMBIZER

PART NO. 11CA

GROUND SCREW
25MB
25PN

O-RING &
SILICONE SEAL
IN GROVES.

PART NO. 11CAC

1/2" CLOSURE PLUG

NORMAL BACK VIEW (REVERSABLE)

1/2" CONDUIT OPENING FOR
BLUE LIGHT SOCKET OR
OTHER ACCESSORY.


FRONT (TRAFFIC) SIDE

18 1/2"
9 1/4"
7 15/16"


BACK SIDE

NORMAL TOP VIEW (REVERSIBLE)

4 3/8"

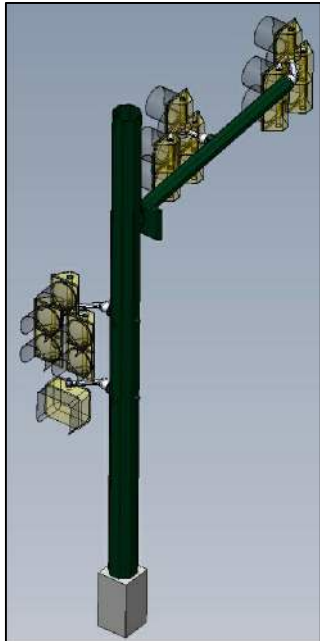

NOTE: WHEN POLE MOUNTING
CLUSTER ADAPTER USE 45BE
EXTENDED THREADED POLE
ADAPTER, SEE DWG. 18.1.

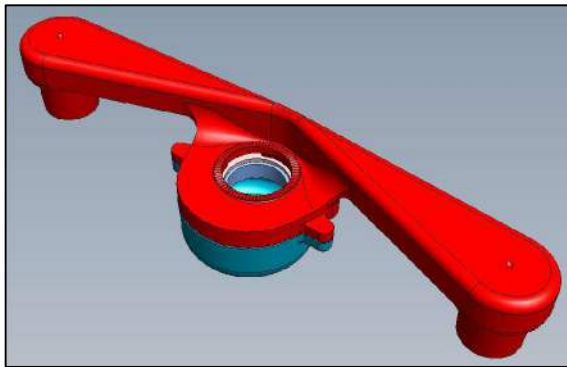

NORMAL ISOMETRIC TOP VIEW

1'
1'
ADJUST TO SCALE