



Vantage Next® Platform

The next generation of an integrated detection system

Features of the Vantage Next platform



Integrated multi-feature control cabinet system for simple installation



Sending high-resolution streaming video to a traffic management center



Form factor options for different cabinet configurations




State-of-the-art platform

Vantage Next® is Iteris' next generation video detection platform that capitalizes on the latest technology. Vantage Next uses a powerful processor that enables future functional growth while maintaining proven Iteris video detection performance and reliability. The architecture supports expanding ITS applications and easily integrates with existing and future technologies.

Easy setup and Configuration

With a user-friendly configuration software and fewer components, the Vantage Next platform sets the bar for simple installation and ease of use.

Surge Panels and Extenders



Vantage Next® Platform

The next generation of an integrated detection system

Benefits

- Easy to install, configure and maintain
- CAT5 cable connections
- Simple and convenient access
- Flexible and scalable
- Multiple CCU configurations available

SPECIFICATIONS

Video Processor

Power	12 or 24 VDC, 5W typical
Video Output	Compressed Digital Stream
Detector I/O	4 open-collector outputs and 4 inputs per processor card
	128 total outputs /64 total inputs using extension modules
Status Indicators	Primary power
	Video input status
	Detection outputs
Communications	Ethernet, DCAM I/F

CCU

Communications	Ethernet
	USB Type A (x2)
	Wi-Fi
	SDLC communications
Video Output	MPEG-4 and H.264
	Resolution XGA 1024 X 768
	Fixed frame rate of 15fps

19" Rack Mount

Power	110/220 VAC
Dimensions	19" L x 8.75" D x 1.75" H (483mm L x 222mm D x 45mm H)
Weight	3.9 lb (1.77kg)
Configurations	Up to 4 sensors, video processors required


NEMA Shelf Mount

Power	48VDC @ 120W
External Power Supply	110/220 VAC
Dimensions	4" L x 10.5" D x 10.5" H (102mm L x 267mm D x 267mm H)
Weight	6lbs (2.72kgs)
Configurations	Up to 4 sensors, video processors required
	TS2; 2 or 4 sensors, no video processors required

General

Op. Temperature	-35°F to +165°F (-34°C to +74°C)
Humidity	0% to 95% non-condensing
Vibration	0.5G, 3 axes, 5-30Hz
Shock	10G in all 3 axes
Regulatory	NEMA TS-2 compliant
	FCC part 15, Class A
Warranty	3 years limited warranty

Vantage Next Viewer
and Next Setup Tool

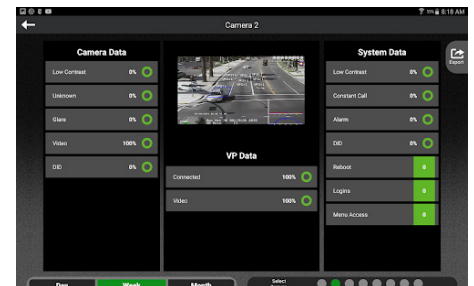

Windows is a registered trademark of Microsoft.
iOS is a registered trademark of Apple.



Copyright © 2019 Iteris, Inc. All rights reserved.

NOTICE: Iteris, Inc. reserves the right to change product specifications without notice. Information furnished is for informational purposes only. This information may not be complete or the latest revision. For the most up-to-date information, please contact Iteris, Inc.

iteris®