



Product Description

Multilink's Signature Series offers a complete line of fiber patch panel products (both wall and rack mount) for our CT-X cassette. Multilink's CT-X cassette offers a system wide modular solution for fiber connectivity. The CT-X cassette is fully integrated with each Signature Series product including the FWM-2X-BK. It can hold up to (2) CT-X cassettes or (2) FTM adapter panels.

The non-captive cable entrances allow pre-connectorized cable assemblies to be easily installed, and 3/4" or 1" NPT fittings can be installed on the network side for strain relief. Each Signature Series wall mount is built from 16 GA Steel with a polyester powder coat finish to provide extreme durability. The FWM-2X-BK provides additional security by using a cam lock on the internal door. This allows limited access to anyone who is not a technician.

Features & Benefits

- Main outer door equipped with a quick latch.
- Inner door equipped with a cam lock to ensure security.
- Hasp tab allows use for a pad lock (*not included*).
- Easy removable foam gasket pad for in-the-field use.
- Bulkhead bracket holds (2) CT-X cassettes or FTM adapter panels.
- Allowing up to 48 individual splices (*when using LC adapters/connectors*).
- Includes fiber management spools to follow the proper fiber bend radius.
- Integrated lance T's create fiber management tie down points for an easier application.
- Includes a ground lug to secure each fiber entry and exit cable.
- Allows for various strain relief kits according to cable type and diameter.

Specifications

Parameter	Specification
Dimensions:	14" W x 10.95" H x 4.3" D
Weight:	10 lbs
Material:	Steel
Finish:	Black Textured Powder Coat
Capacity:	(2) CT-X Cassettes or (2) FTM Modules
Security:	Cam Lock (inner door) & Hasp Tab (outer door)
Mounting:	Wall


Accessories

FWM-2X Accessories


Products	Description	Stock ID
	3/4" NPT Strain Relief Kit	065-104-10
	1" NPT Strain Relief Kit	065-016-10
	FWM-2X CT-X Bracket Kit	072-283-10
	FWM-2X FTM Bracket Kit	072-509-10

Dimensional Drawings

045-788-00

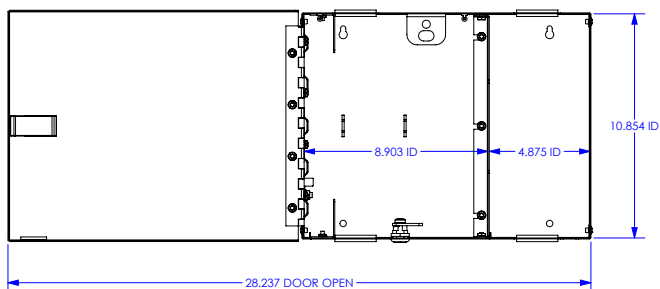


*Bracket Shown for Reference Only

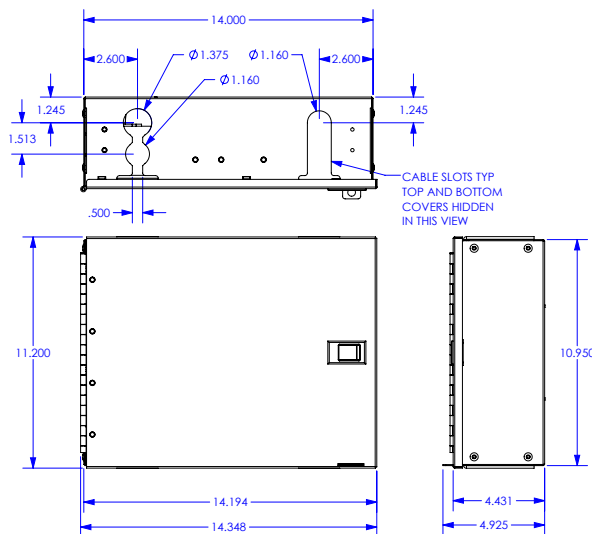

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com

Ordering Guide

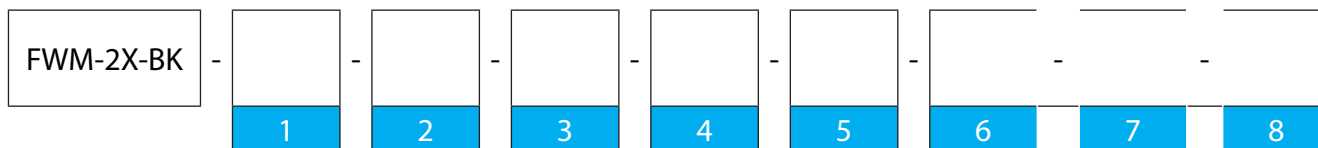

1	Module
FTM	FTM Module
CT-X	CT-X Cassette

2	# of Modules
01	1 Module
02	2 Modules

3	Module Style
P	Patch
S	Splice
M	MPO

4	Adapter Type
SCA	SC/APC SM 900µm
SCU	SC/UPC SM 900µm
LCA	LC/APC SM 900µm
LCU	LC/UPC SM 900µm
SC1	SC/PC OM1 62.5µm
SC2	SC/PC OM2 50µm
SC3	SC/PC OM3 50µm
SC4	SC/PC OM4 50µm
LC1	LC/PC OM1 62.5µm
LC2	LC/PC OM2 50µm
LC3	LC/PC OM3 50µm
LC4	LC/PC OM4 50µm
ST1*	ST/UPC SM
ST2*	ST/PC MM

5	# of Conn. / Module
06	6 Fiber
12	12 Fiber
24*	24 Fiber

*Option ONLY Available with LC Adapters

6	Fiber Type
9	900µm
R	Ribbon
LT	Loose Tube
J	Jumper

7	Fiber Jacket
SW	Spiral Wrap
OFR	OFNR
OFP	OFNP
OP	OSP

*Option Not Available for CT-X Cassette

8	Pigtail Length
05	.5
1M	1
3M	3
XX	Custom

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: lasupport@gomultilink.com

Multilink®

Innovation At Work

Multilink Inc.
 580 Ternes Ln
 Elyria, OH 44035
 Tel: (440) 366-6966
 Fax: (440) 366-6802



facebook.com/GoMultilink1



twitter.com/GoMultilink



youtube.com/GoMultilink

© Multilink Inc. 2019 • All Rights Reserved

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: lasupport@gomultilink.com

Contact Us